










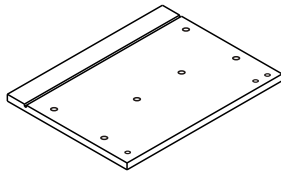
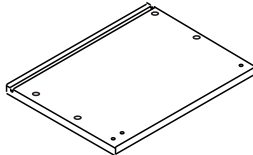

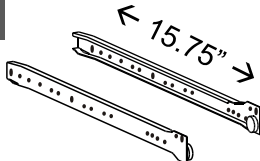
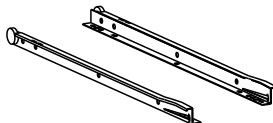



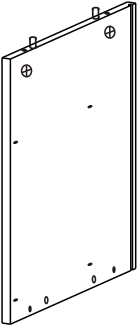
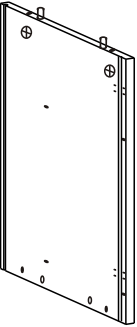












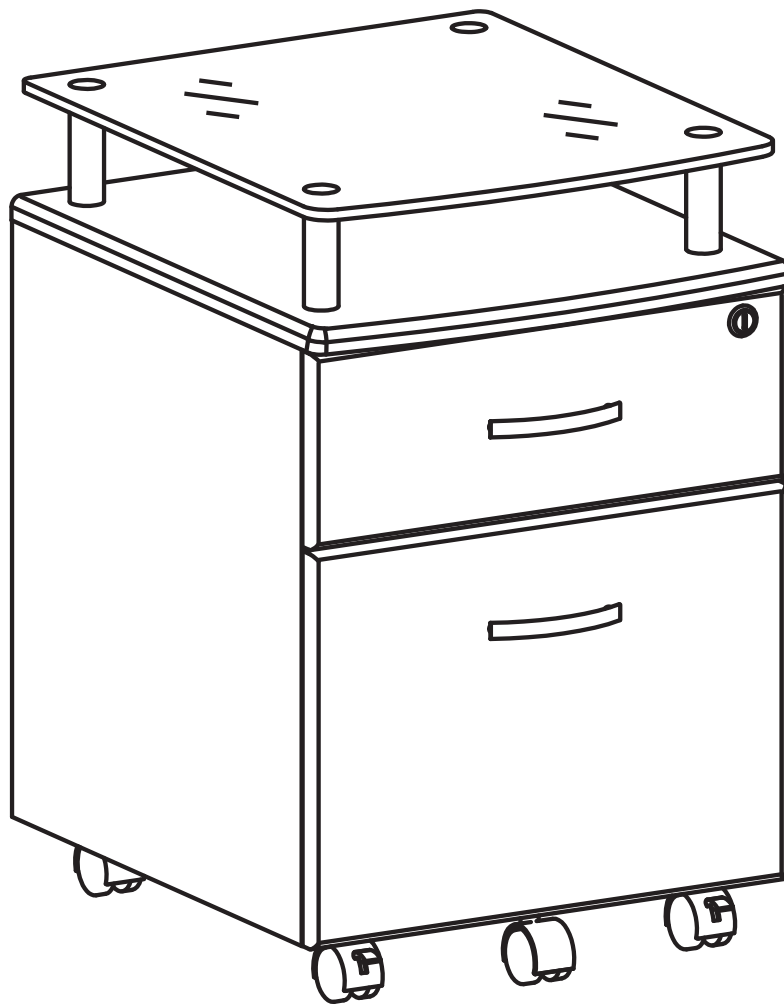

# ASSEMBLY INSTRUCTIONS














 **WARNING:** To avoid serious personal injury:

- Carefully and strictly follow assembly instructions. Improper assembly of furniture can result in structural failure, instability of the product, or tip-over.
- Monitor and carefully control the assembly components. These include small parts and hardware that may present a choking hazard to small children. Bob's furniture should be assembled only by responsible adults and children should not be involved in the assembly process.
- Where provided, wall mounting hardware should always be used as prescribed in these instructions to anchor furniture to wall. Proper use of the wall mounting hardware can significantly reduce the potential for furniture tip-over and crushing injuries.

MAIN PARTS LIST			
<div>1</div> <div>x1</div> <div>Top drawer left panel</div> <div></div>	<div>2</div> <div>x1</div> <div>Top drawer right panel</div> <div></div>	<div>3L</div> <div>x2</div> <div>Locking caster</div> <div></div>	<div>4</div> <div>x1</div> <div>Top drawer front panel</div> <div></div>
		<div>3N</div> <div>x2</div> <div>Non-locking caster</div> <div></div>	
<div>5</div> <div>x2</div> <div>Drawer bottom panel</div> <div></div>	<div>6</div> <div>x1</div> <div>Top drawer back panel</div> <div></div>	<div>7</div> <div>x1</div> <div>Bottom drawer left panel</div> <div></div>	<div>8</div> <div>x1</div> <div>Bottom drawer right panel</div> <div></div>
<div>9</div> <div>x1</div> <div>Bottom drawer front panel</div> <div></div>	<div>10</div> <div>x1</div> <div>Bottom drawer back panel</div> <div></div>	<div>11</div> <div>x1 Set</div> <div>File tubes, Set of 2 pcs</div> <div></div>	
<div>12</div> <div>x2 Set</div> <div>Sliders, Set of 4 pcs for each drawer</div> <div><div> ← 15.75" → "Flat": 2 pcs, go inside the cabinet</div><div> "L shaped": 2 pcs, go on the drawers</div></div>		<div>13</div> <div>x2</div> <div>Handle</div> <div></div>	
Continue on next page.			

<b>14</b> x1 Left panel 	<b>15</b> x1 Right panel 	<b>16</b> x1 Bottom panel 	<b>17</b> x1 Back panel 
<b>19</b> x1 Set L bracket and Nut 	<b>20</b> x1 Bottom drawer front wheel 	<b>18</b> x1 Top wood panel 	<b>22</b> x1 Top glass panel 
<b>23A</b> x1 Set Metal fitting A, set of 2 pcs 	<b>23B</b> x1 Set Metal fitting B, set of 2 pcs 	<b>21</b> x4 Support tube  ← Ø1x2.75" →	<b>23C</b> x1 Set Metal fitting C, set of 2 pcs 
<b>23E</b> x1 Metal locking bar  ← 16.75" →	<b>23D</b> x1 Set Lock and keys, matching set 	<b>23F</b> x1 Set Tiny screw F for 23C, set of 2 pcs 	<b>23G</b> x1 Metal ring G for lock 

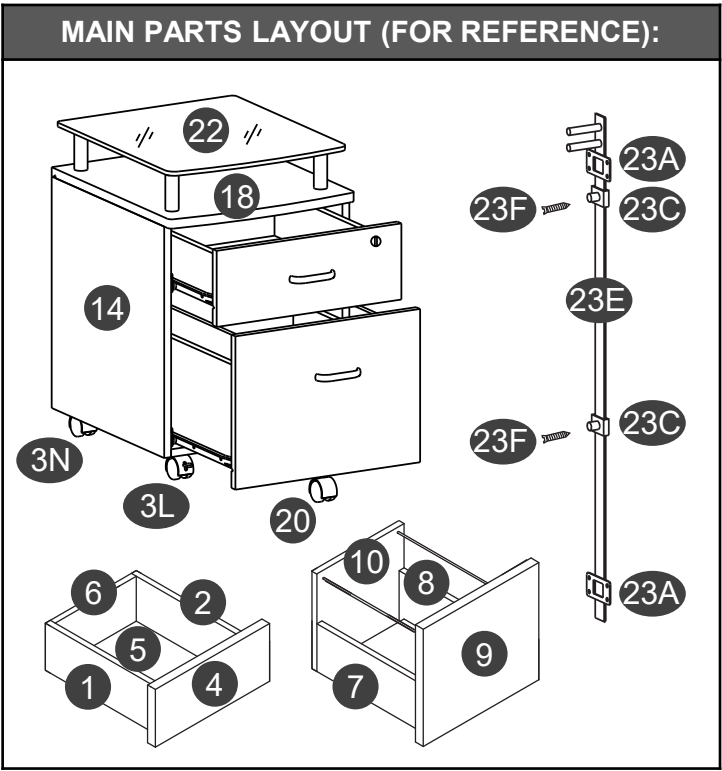


LIST OF HARDWARE, SCREWS AND FITTINGS			
PART	QTY	ITEM	
A	16	M6x40	
B	8	M4X35	
C	30	M3x15	
D	4	M4x20	
E	18	M4x14	
F	1	M6x12	
G	4	M6x20 Headless	
H	4	M6x35	
	1		
	1		

## BEFORE YOU START THE ASSEMBLY, PLEASE READ THE FOLLOWING TIPS AND WARNINGS.


- Please read the assembly instructions thoroughly and follow step by step.




- Make sure you understand which hardware will be used on each step. Using the wrong size of screw, bolt or pin might strip the threads or cause damage to the part in which it is being used.

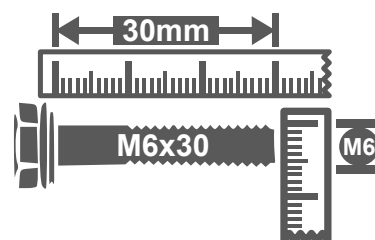

- To avoid misalignments, always leave the screws loosely and do not tighten them until all the pieces are positioned correctly.




- Do not overtighten or force the screws as they might break, strip, damage the threads of the holes, or get stuck inside the parts.




- If the hole seems too small for the screw, make sure you are using the correct size of screw and/or that you are installing it in the correct hole.



- Sometimes on the wood panels the laminate or material might be covering the hole partially or entirely, if there is no visible hole or if it looks too small, pass and press the tip of your finger over the area to feel its indentation, and carefully pierce the laminate to uncover the hole underneath.

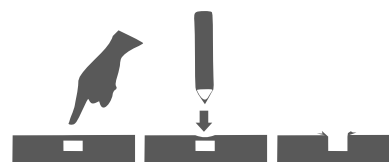

- After the item is assembled, you can use rubbing alcohol to erase or remove the visible part numbers printed or labeled on the pieces.



## THE ASSEMBLY STEPS START ON NEXT PAGE


### CAM BOLT AND CAM LOCK TUTORIAL

THE INSTRUCTIONS BELOW  
ARE NOT ACTUAL ASSEMBLY STEPS




This unit uses cam bolts and locks (also known as mini fixes).  
If you are not familiar with this kind of hardware, the below is a tutorial  
that explains how to use them on the steps where they are required.

1. Screw the bolt into the indicated hole on the panel indicated in the assembly step.

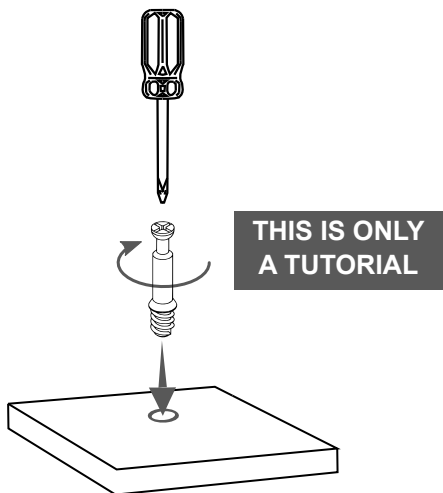


2. Join the other panel (with the big hole) to the panel with the bolt. If it comes with the cam locks already pre-installed, make sure to align them to receive the bolt's head (refer to point 3). There might be a very small gap between the panels which is normal.


If the cam locks come pre-installed, make sure they are aligned (see point 3).

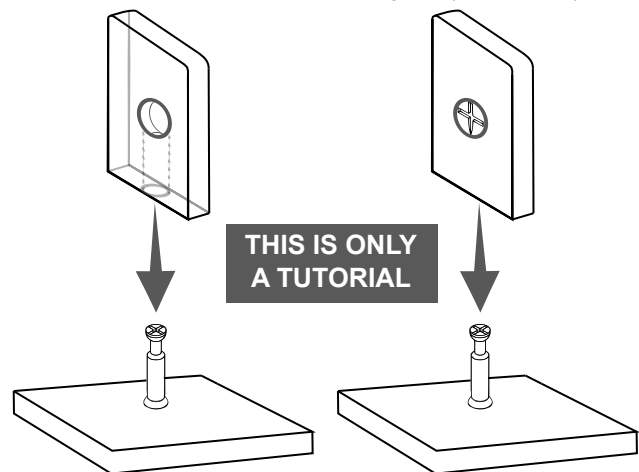

3. Insert the cam lock on the panel with the big hole making sure it goes aligned to receive the bolt's head.

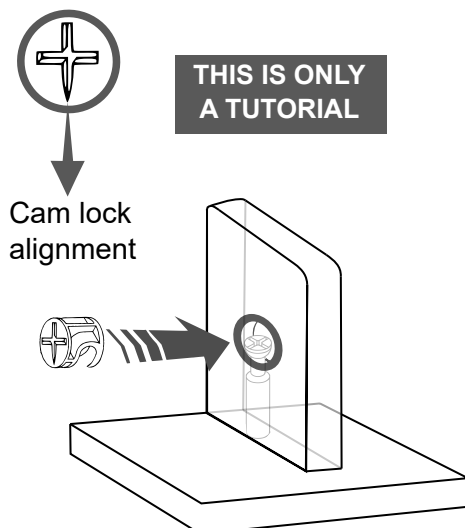

4. Use a Phillips screwdriver to turn the cam lock clockwise. This will lock the panels together and also will close any gaps.

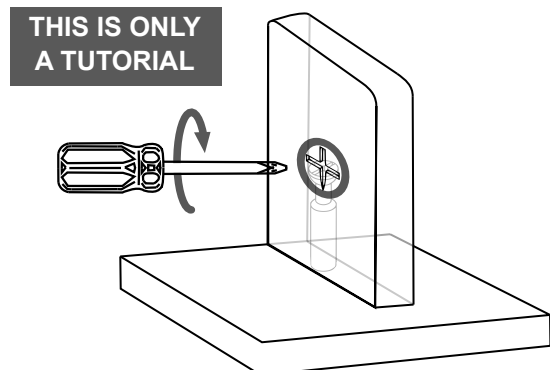


## ASSEMBLY STEPS

**WE RECOMMEND TO PLACE THE PIECES OVER BLANKETS TO PROTECT THEIR FINISH DURING ASSEMBLY.**

**STEP 1****Hardware:****E**


M4x14

16  
Pcs



Attach the casters **3** to the bottom surface of panel **16** with screws **E** as indicated:

- The locking casters **3L** go at the FRONT of the panel.
- The non-locking casters **3N** go at the BACK.

BOTTOM surface:


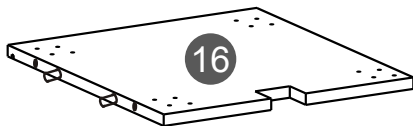


TOP surface:

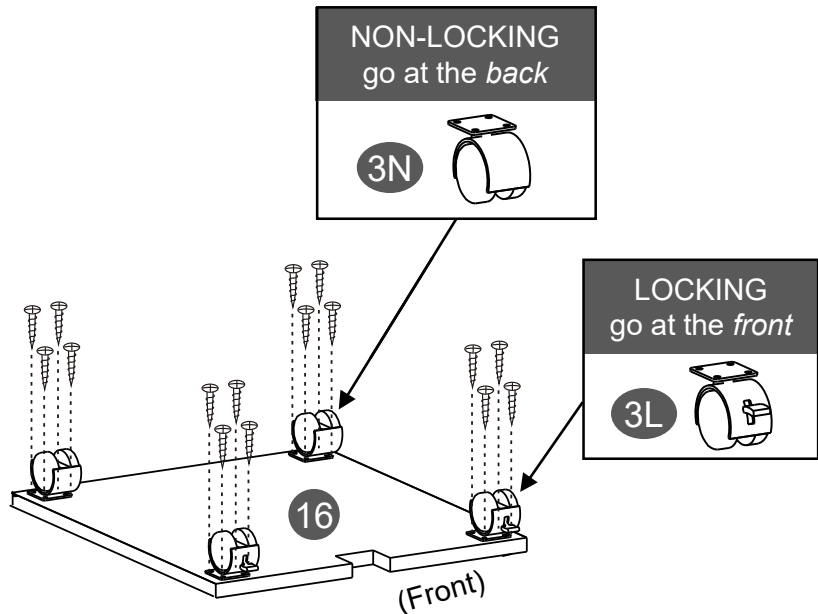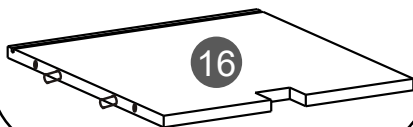**STEP 2****Hardware:**

- Slide the metal fittings through the metal bar **23E** in the following **exact** order:
  - One of **23A** with the flat side **UP**.
  - Both **23C** facing **UP**.
  - The second **23A** with the flat side **UP**.
- Align the pieces **23C** in between the marks on the bar **23E**, and insert the tiny screws **23F** into **23C** and tighten to leave **23C** stationary within those marks.

FIRST INSERT:

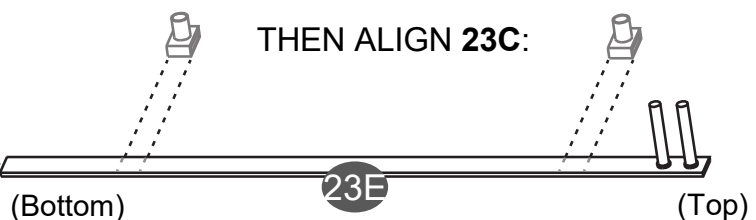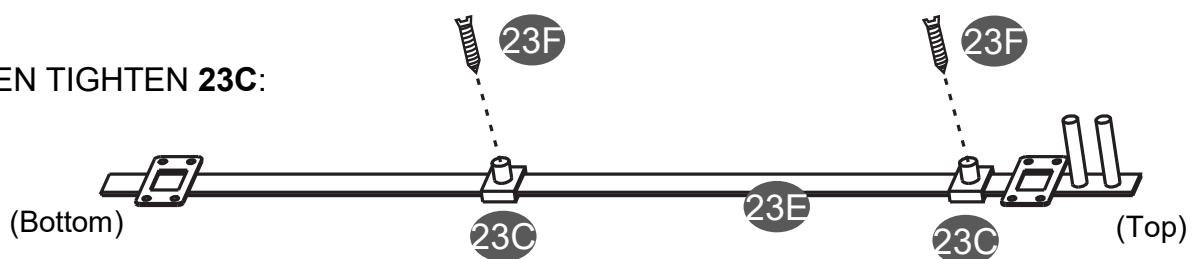
**23A** go with flat side facing **UP**.THEN ALIGN **23C**:THEN TIGHTEN **23C**:

## STEP 3



## Hardware:

C

M3x15

8  
Pcs

Assemble the locking system to the right panel **15** by attaching the fittings **23A** with screws **C** as shown.

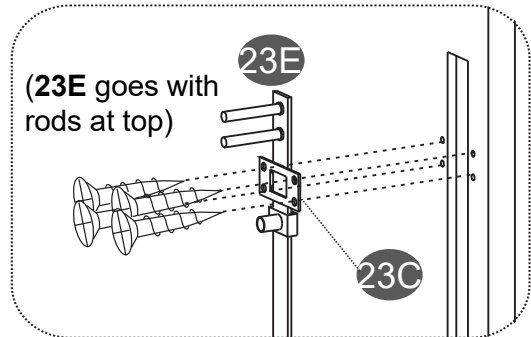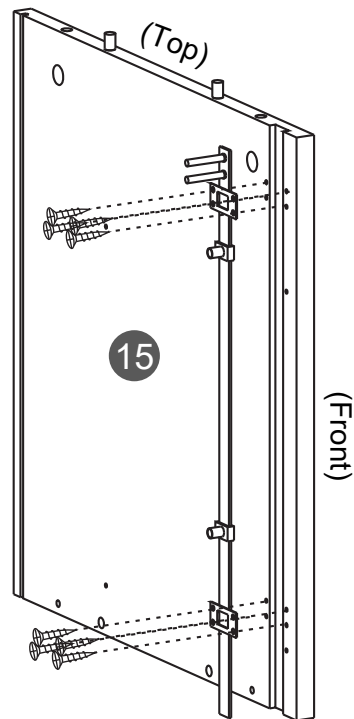


## STEP 4

Grab all the 3 sets of sliders **12** (total 4 pieces) and separate them into 2 groups according to their shape:


- The "flat" ones will be used on the next step.
- The "L" shaped won't be used until steps **17 and 24**, so set them aside.

**12** "Flat", x2

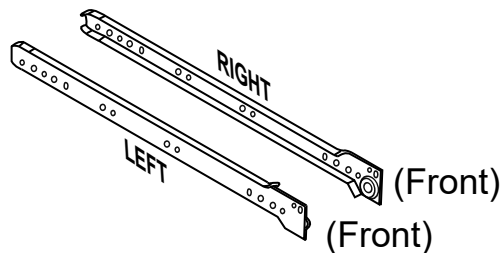

The "flat" ones will be used on the next step.

**12** "L" Shaped, x2

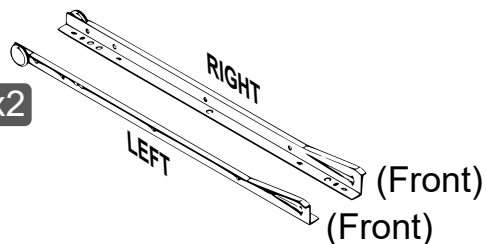

The "L" shaped won't be used until steps **17 and 24**, so set them aside.

## STEP 5

## Hardware:


C

M3x15

8  
Pcs

Assemble the “Flat” sliders **12** to the side panels **14** and **15** with screws **C**. Please note:


- The wheel is at the front, and faces down with 2 holes above it.
- The sliders attach at the front on the 2nd hole.
- The grooves on the panels are located at the back.

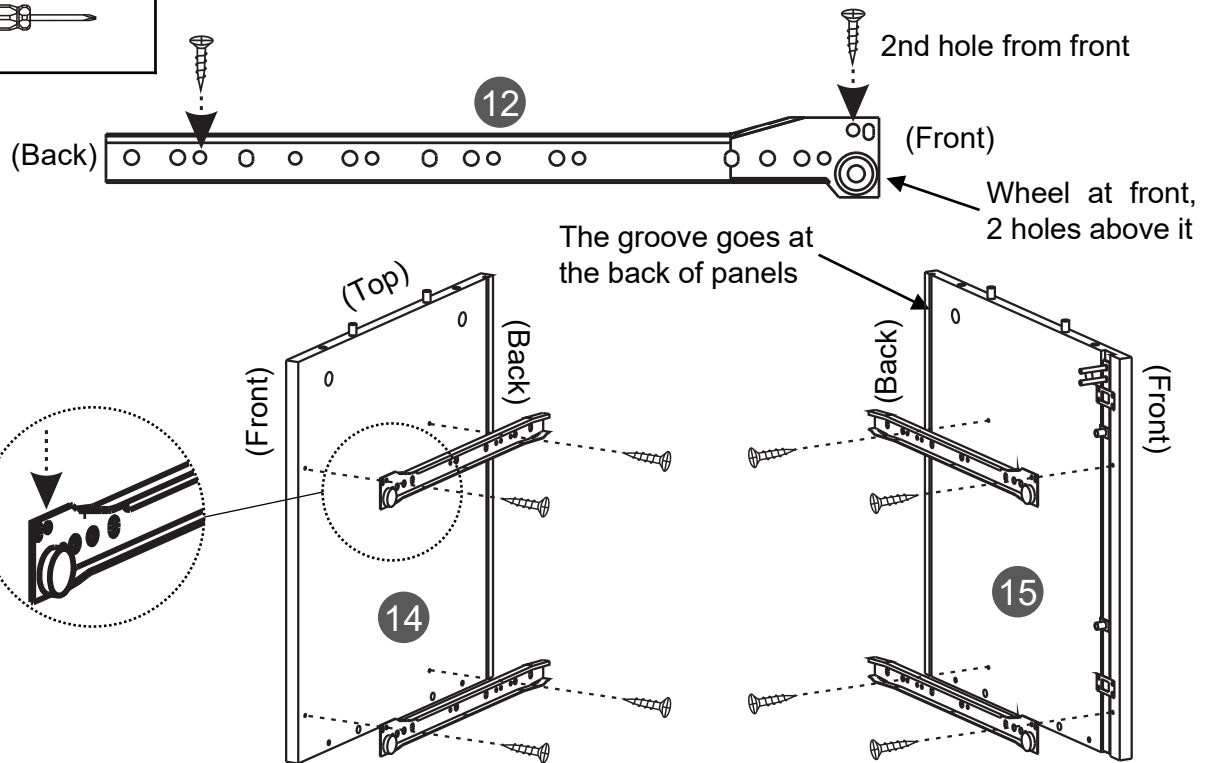

## STEP 6


## Hardware:

A


M6x40  
Bolt4  
Pcs

- Attach the bolts **A** to panels **14** and **15** into the indicated holes.
- Check and make sure the cam locks on panel **16** are aligned and ready to receive the bolts, just as explained in page 4.
- Join panels **14** and **15** to panel **16** and turn the cam locks.

FIRST:

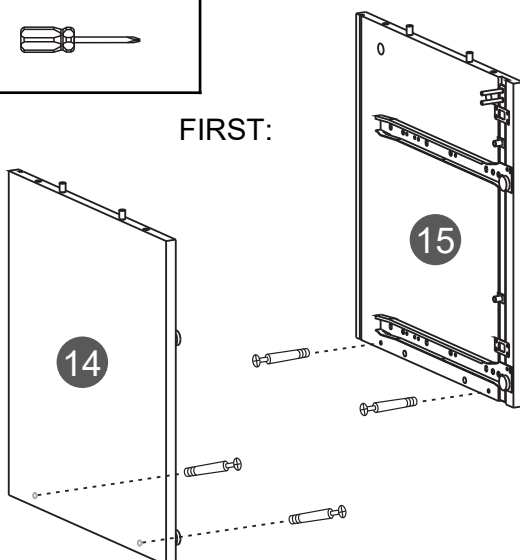


THEN:

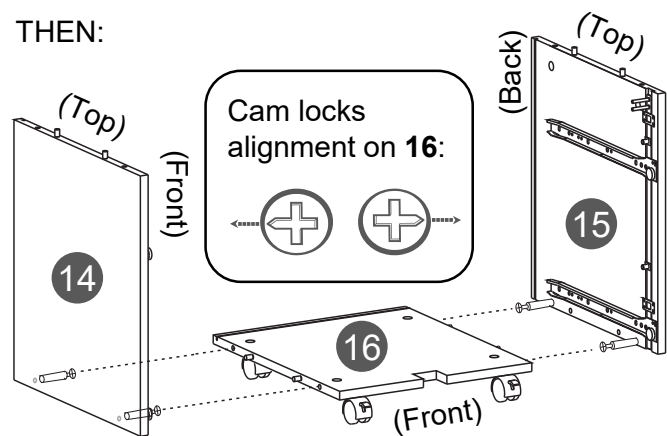



## STEP 7

Slide in the back panel **17** through the grooves of panels **14** and **15** and into the groove of panel **16**.

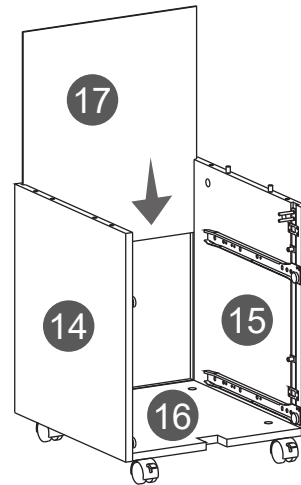


## STEP 8


## Hardware:

A

M6x40  
Bolt

4  
Pcs

- Attach bolts **A** to the bottom surface of the top wood panel **18**.
- Align cam locks on panels **14** and **15**.
- Assemble panel **18** to **14** and **15** as explained in page **4**.

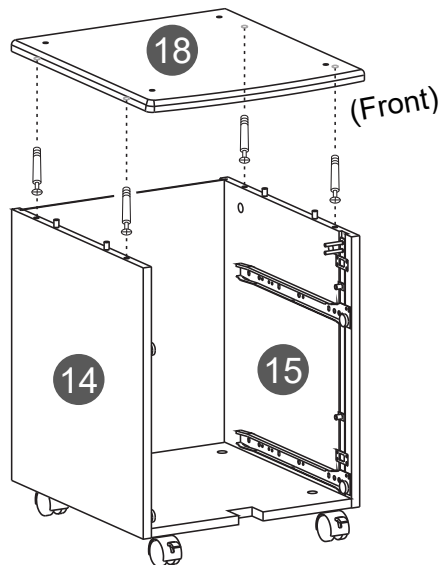

Cam locks  
alignment



## STEP 9


## Hardware:

G

M6x20  
Headless


4  
Pcs

Assemble the support tubes **21** to the discs on the top glass panel **22** with screws **G**.

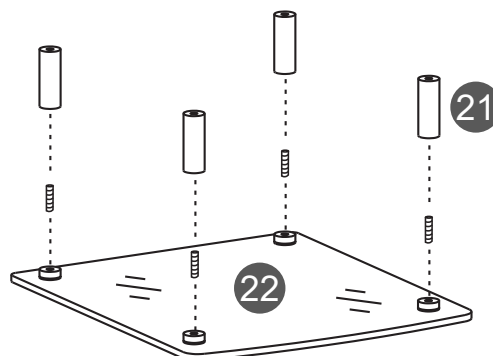


**STEP 10****Hardware:****H**


M6x35

4  
Pcs

Assemble the support tubes **21** to the top wood panel **18** with screws **H** from underneath.

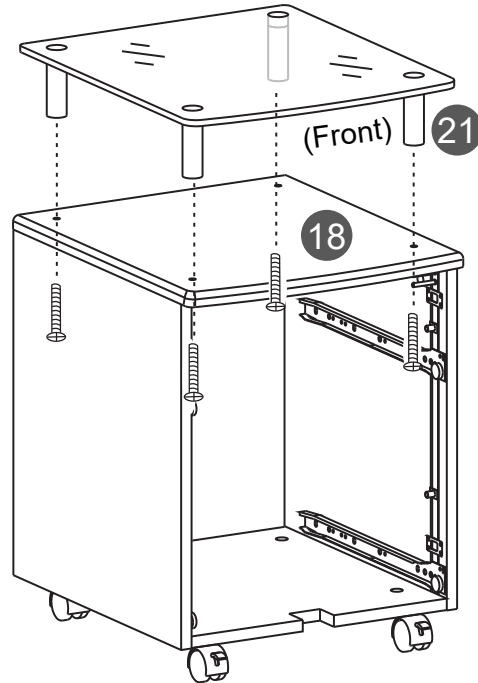
**STEP 11****Hardware:****C**

M3x15


4  
Pcs

Attach the metal fitting **23B** to the drawers right panels **2** and **8** respectively with screws **C**.

NOTE: The "U" on the fitting must face DOWN.

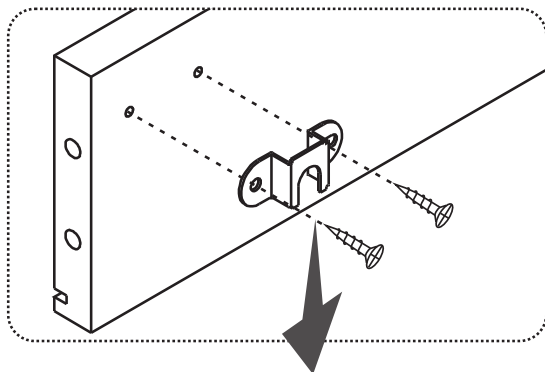

The "U" on 23B  
must face DOWN

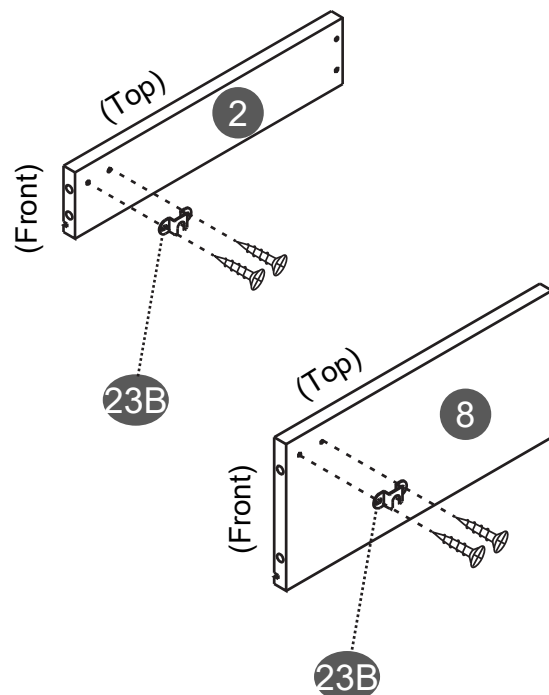


## STEP 12

## Hardware:

A


4  
PcsCam locks  
alignment

For the top drawer,  
assemble side panels **1**  
and **2** to the front panel **4**  
with bolts **A**.

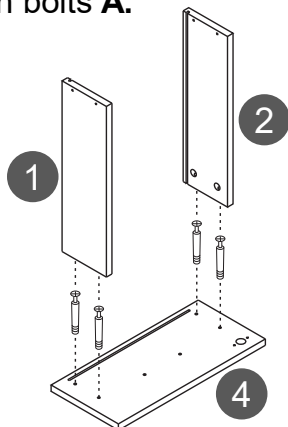

## STEP 13

Slide one of the bottom panels **5** through  
the grooves of the side panels and into the  
front panel as shown.

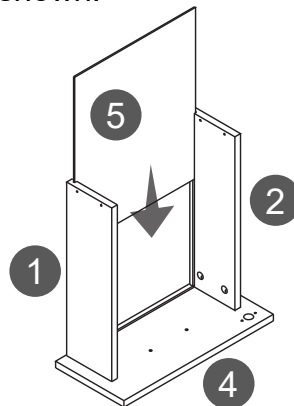


## STEP 14

## Hardware:

B

4  
Pcs

Assemble the back panel  
**6** to the side panels **1** and  
**2** with screws **B**.

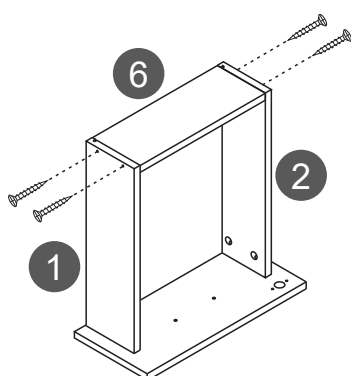


## STEP 15

## Hardware:

D

2  
Pcs

Assemble one of the  
handles **13** to front panel **4**  
with screws **D**.

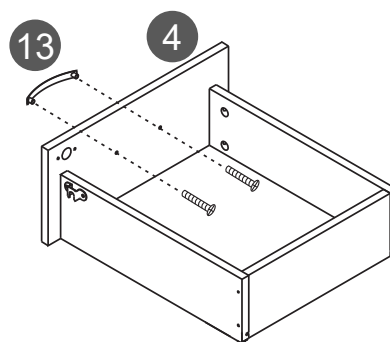

## STEP 16

## Hardware:


C

2  
Pcs




- Assemble the lock **23D** to the interior face of the front panel **4** with screws **C**, making sure the keys will make the rod rotate from the bottom to the top in a counter-clock motion.
- Attach the ring **23G** to the lock at the front.

**NOTE: If the lock is installed turning the wrong way, the rod might get stuck with the drawer locked, unable to open it.**

**INCORRECT:**  
It might get the  
rod stuck and  
drawer might  
not open.



**CORRECT:**  
Bottom to top  
in counter-  
clock motion.

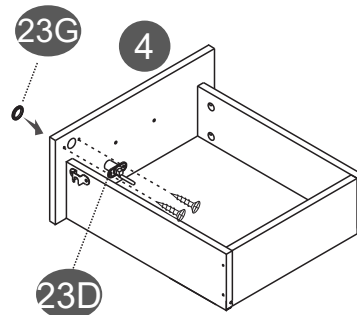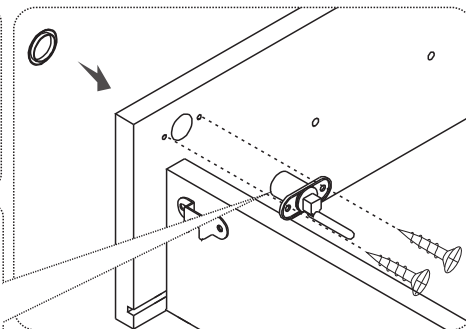

## STEP 17


## Hardware:

C


M3x15

4  
Pcs


Flip the drawer upside-down and assemble the "L" sliders **12** with screws **C**, making sure the wheel goes towards the back, and that they don't protrude, otherwise, the drawer raises 1" and won't fit in the cabinet.

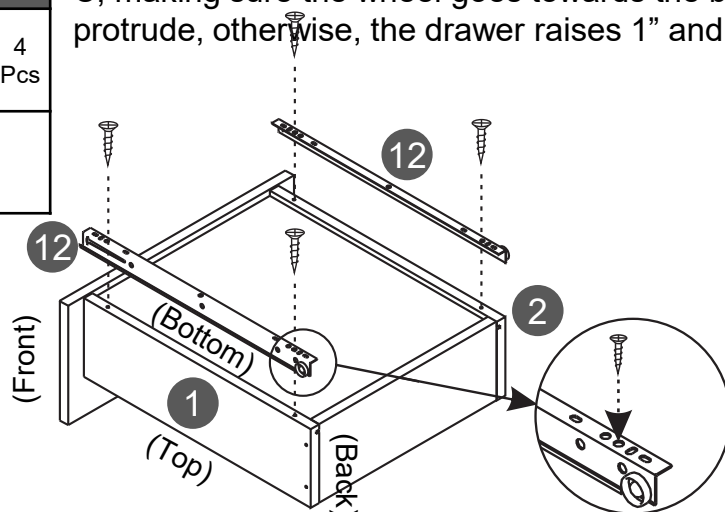

When finished, the sliders look like this:



If you install as below, the drawer raises 1" and won't fit in the unit.



## STEP 18

## Hardware:


E

M4x14


2  
Pcs

F

M6x12

1  
Pc


- For the bottom drawer, assemble the L bracket **19** to the front panel **9** with screws **E** and **F**.
- Assemble the front wheel **20** to the bracket **19** with the nut **19**.

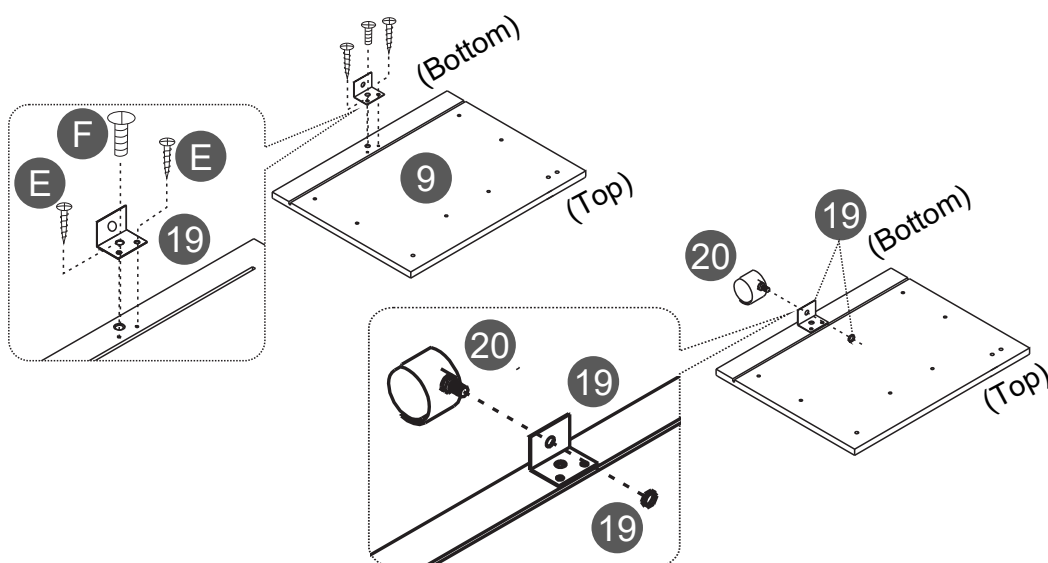


## STEP 19

## Hardware:

A


M6x40  
Bolt4  
Pcs

Assemble side panels **7** and **8** to the front panel **9** with bolts **A**.

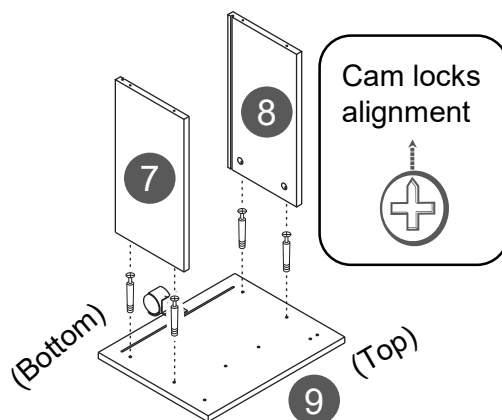


## STEP 20

Slide the bottom panel **5** through the grooves of the side panels and into the front panel as shown.

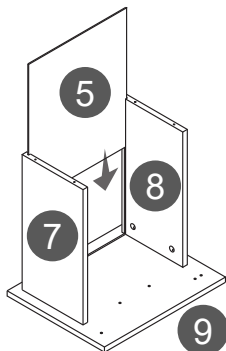


## STEP 21

## Hardware:




Assemble the back panel **10** to the side panels **7** and **8** with screws **B**.

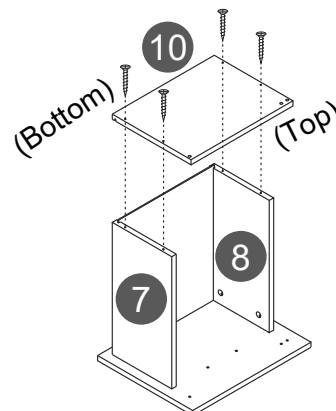


## STEP 22

Insert the file tubes **11** through the corresponding hole on panel **10** and screw into panel **9**, but **DO NOT OVERTIGHTEN** to avoid accidental damage humps or perforation.

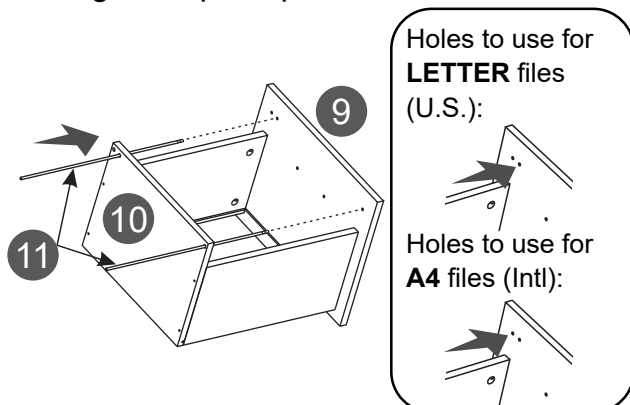


## STEP 23

## Hardware:




Assemble the handle **13** to front panel **9** with screws **D**.

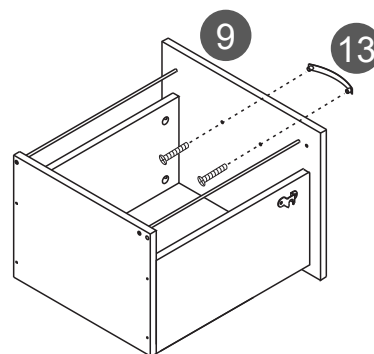


## STEP 24


## Hardware:



Flip the drawer upside-down and assemble the "L" sliders **12** with screws **C**, making sure the wheel goes towards the back, and that they don't protrude, otherwise, the drawer raises 1" and won't fit in the cabinet.

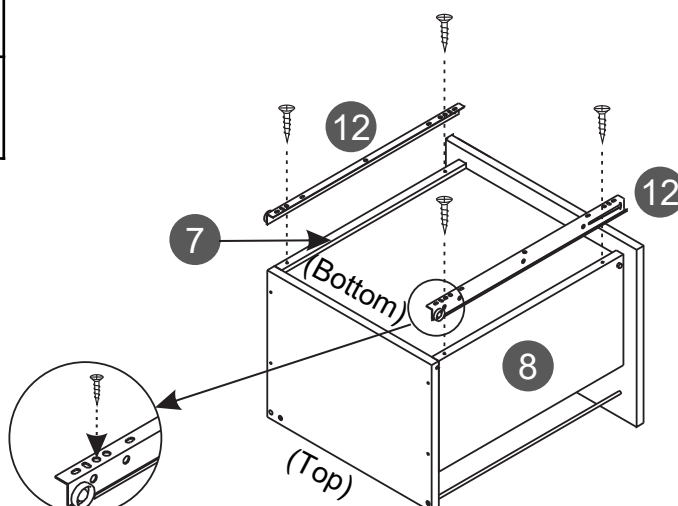

When finished, the sliders look like this:




If you install as below, the drawer raises 1" and won't fit in the unit.



Sliders — **RAISES 1" !!!**


## STEP 25

- Insert the drawers into the cabinet, starting with the bottom then the top. Insert at an angle with their fronts facing down, making sure the wheels from the drawer slide in the middle of the sliders inside the cabinet. If the top drawer does not enter, review the assembly done in steps **5**, **17** and **24**.
- Test the lock on the top drawer: make sure the bottom drawer is completely closed and the rod on the lock is facing **DOWN**; the key must turn **COUNTER-CLOCKWISE**. If the key turns clockwise, or the drawers don't lock, review the assembly done in steps **2**, **3**, **11** and **16**.

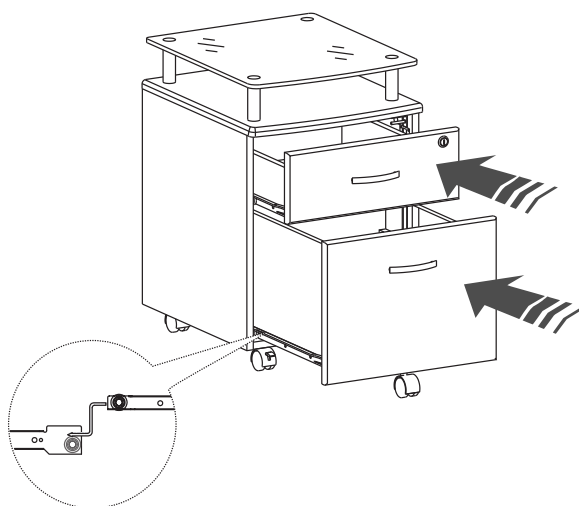


## TROUBLESHOOTING THE LOCK SYSTEM

- Please note that for the drawers will lock only if they are closed flushed.
- If the unit does not lock, review the assembly done in steps **2**, **3**, **5**, **11**, **16**, **17** and **24** for the correct assembly of the locking system and the drawer sliders.
- If the keys are lost but the cabinet is unlock, replace them with a new set of lock and keys.
- If the cabinet is locked, and the keys are lost or don't want to turn, email Support for assistance and instructions for solving this problem.

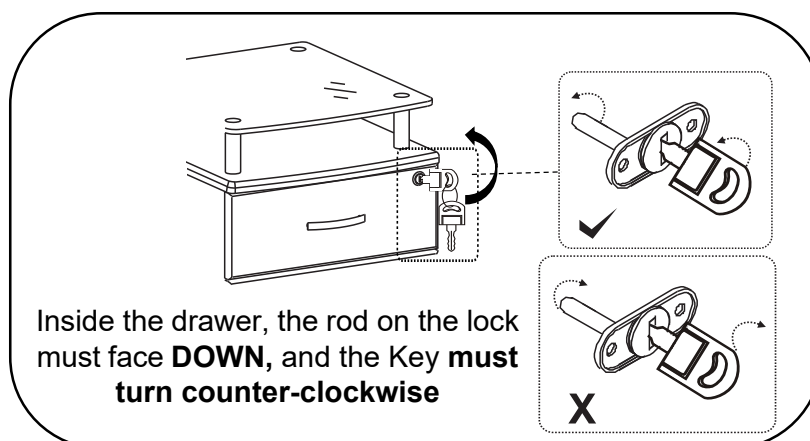

## WEIGHT LIMITS

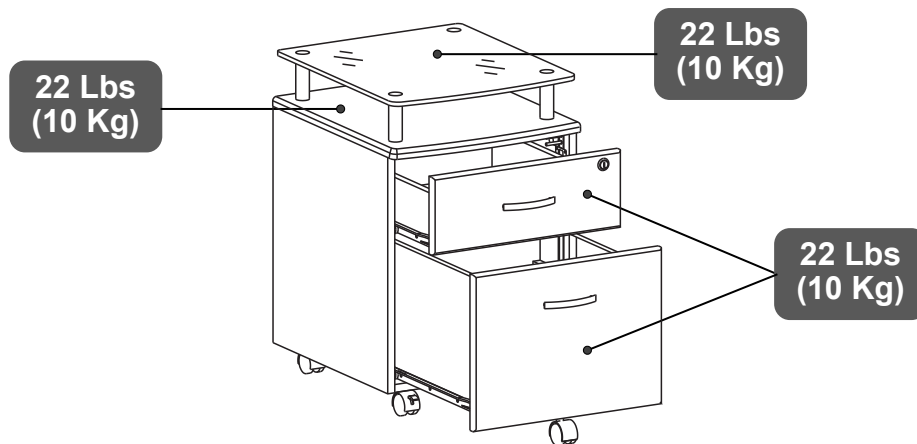

## WARNINGS

- Do not exceed the indicated weight limits.
- Do not expose the surfaces to direct sunlight or to extreme environmental conditions.
- Do not use solvents or abrasive materials to clean the unit.
- Do not sit on the unit or lean against it.
- Do not allow small children to climb over the unit.
- Do not allow small children to reach inside the drawers without your supervision.
- Before moving the unit, unlock the front casters and secure or remove any object that might fall off while the unit is rolling.
- Please note that lifting the unit from the glass top might lead to part damage/separation.
- The glass is made of safety tempered glass. The safety feature is that when breakage occurs, the glass shatters into many tiny pieces minimizing the risk of serious injuries. If the glass breaks, do not handle the pieces with your bare hands, take some pictures and contact Support.
- The warranty does not extend to regular wear and tear, nor the manufacturer assumes liability for damages or consequences due to accidents, incorrect assembly, negligence, improper use, modifications, or not heeding the above warnings.

## CARE AND MAINTENANCE

- Clean the surfaces preferable with a clean cloth damped in a solution of mild soap and water, then dry with a clean towel.
- If you decide to use a cleaning agent, test first on an area hidden from view such as underneath the tabletop.
- Every 4 months, inspect the unit completely and make sure that all screws are tighten.
- Do not use if you notice cracks on the glass top.
- When transporting the unit to places far away, protect and secure the unit to avoid damage in transit.